

COMPTECH[®]

WORLD CLASS COMPRESSOR


Lower Installation Cost : The COMPTECH OPPOSE BALANCE Pet Package comes with built in Single point water Inlet/Outlet connection and air outlet connection. It requires very little time and labour during installation. The standard package includes a compact skid mounted compressor, belt guard, electric motor, starter and control panel, after cooler, non return valve with optional Air Dryer, compressed air filter and Air Receiver. It's ready to use. Just plug in to Power Supply. There is no need of foundation.

Lower Operating Costs : Low power consumption is a key feature and makes a big difference in your electricity bill.

Low Maintenance Costs : A rugged Cast Iron design ideal for Heavy duty & continuous 24 x 7 operation year after year.

OPPOSE BALANCE DOUBLE ACTING, WATER COOLED AIR COMPRESSOR

The Most Power Efficient Low Cost-Solution for Pet Blowing

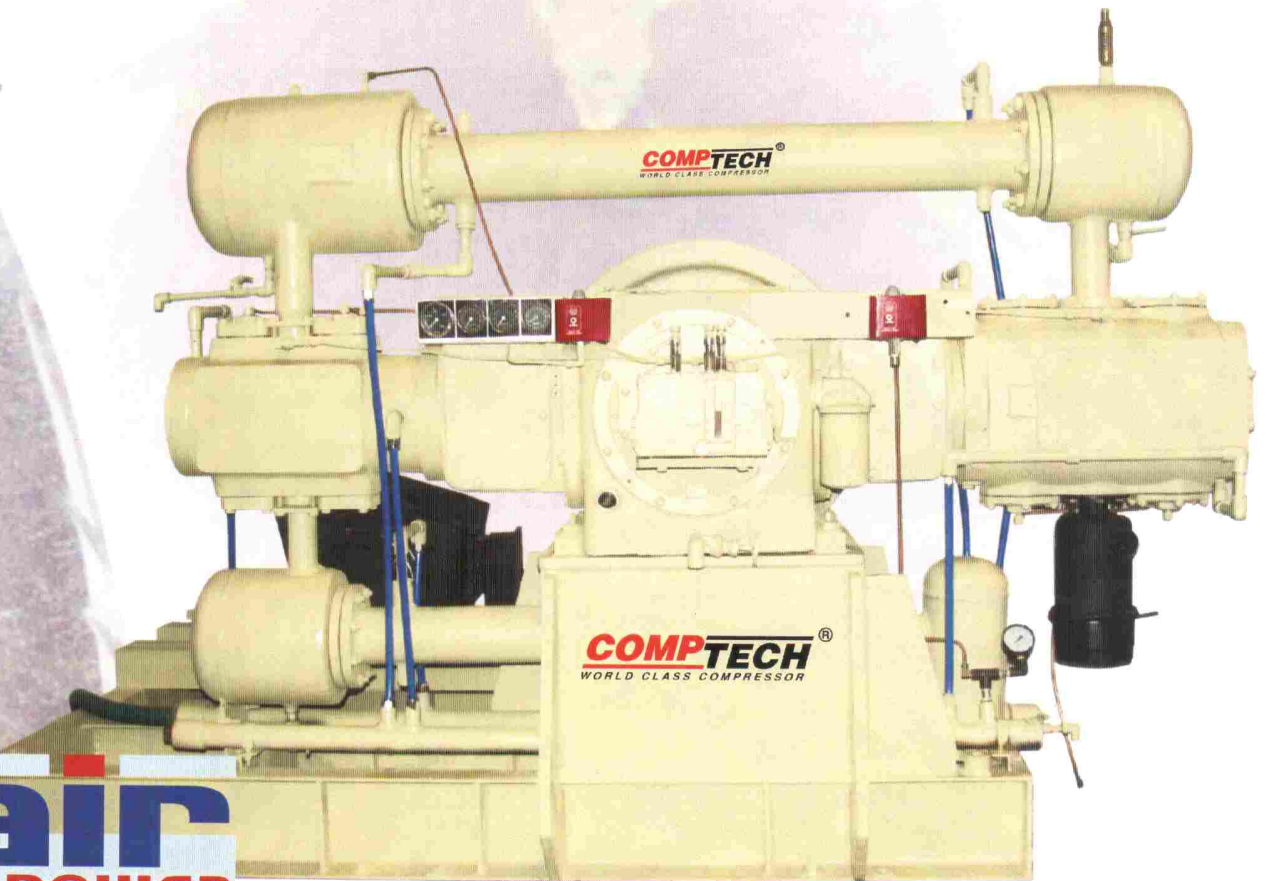

more
air
for less **power**


Model No.: CTOB30/40 PET PACKAGE

Model	Motor hp	No. of Cylinders	Cfm		Working Pressure	Compressor Rpm	Dimensions L W H (in cms)	Approximate Weight (in Kgs)
			pd	fad				
CTOB30/30	30	2	124	96	25 kg	531	260 x 155 x 160	1700
CTOB30/40	40	2	157	117.6	30 kg	675	260 x 155 x 160	1700
CTOB30/50	50	2	195	148	30 kg	675	260 x 155 x 160	1700
CTOB42/75	75	3	258	196	42 Kg	675	260 x 155 x 160	2000
CTOB42/125	125	3	355	287	42 Kg	600		

**HIGH PRESSURE AIR COOLED AIR COMPRESSOR
PACKAGES FOR PET BLOWING**



Model No. 115T2 Pet Package



LOW PRESSURE TWO STAGE HEAVY DUTY AIR COOLED COMPRESSOR							
Model	Motor hp	No. of Cylinders	Cfm		Working Pressure	Air Receiver (ltrs.)	Compressor rpm
			pd	fad			
CT7/10	7.5	2	29.8	23	10	300	750
CT10/10	10	2	36.43	28.5	10	300	916
115T	20	3	81	60	10	500	900
HIGH PRESSURE AIR COOLED COMPRESSOR FOR PET BLOWING							
107T2	12.5	2	40	24.30	35	300	900
115T2	15	3	41.26	31.41	35	500	750
115T2	20	3	49.5	37.7	35	500	900
CT120T2	15	3	44	37	25	500	680
CT120T2	20	3	49.5	42	35	500	750
CT115TH	20	3	61.8	46	25	500	680
HIGH PRESSURE PET BLOWING AIR COMPRESSOR WITH WATER COOLED INTER COOLER							
CTWC120T2	15	3	44	37	25	500	680
CTWC120T2	20	3	49.5	42	35	500	750
CTWC115TH	20	3	61.8	46	25	500	680

The compressors can be supplied bare, baseplate mounted or receiver mounted. The designs / specifications are subject to change without notice on account of frequent improvement in products' quality.

A proven quality all over World from :
COMP-TECH EQUIPMENTS LTD.
Naroda Road, Ahmedabad - 380 025. (INDIA)

J. B. PNEUMATICS
B-5, Sanjeev Tower, A3/4,
Janak Puri, New Delhi - 110 058
Phone : 91-11-32976147
Telefax : 91-11-25613762
E-mail : jbp@engineer.com
Website : www.jbpneumatics.in