


INGERSOLL-RAND®

T30
Distinct

High Performance Lubricant

for Small Reciprocating Air Compressors

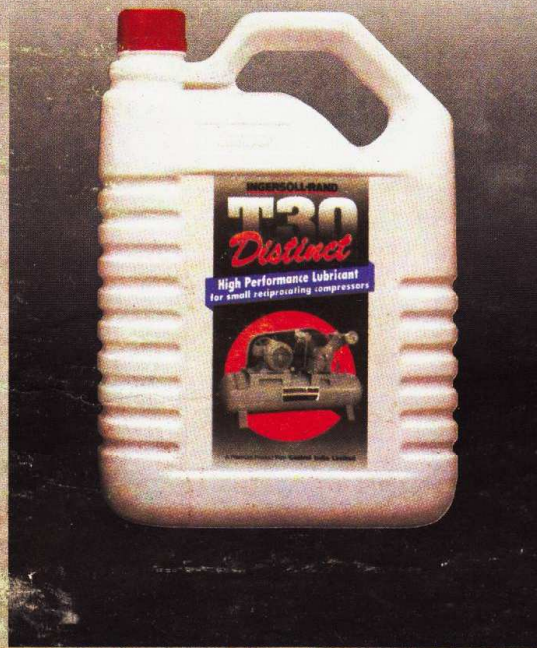

BRANDS (1995)
A-8 Motor Gas
Mrs. R. D. Duns & Co.
L. 2000

T-30 DISTINCT

Specially formulated to increase service life of Ingersoll-Rand Type-30 small reciprocating aircompressors. T-30 Distinct has been formulated from solvent refined base oil fortified with selected anti-oxidant, anti-rust, anti-foam and anti-wear additives. A high level of thermal and chemical stability offer extended oil drain interval and trouble-free operation of these compressors.

PERFORMANCE BENEFITS

- Excellent anti-wear performance, extended equipment life.
- Stable viscosity, minimal change at various operating temperatures.
- Excellent ability to withstand moisture and water, excellent rust protection.
- Excellent oxidation stability, reduced oil thickening and carbon deposition on components.
- Minimum carbon deposition, cleaner operation.
- Improved heat dissipation, good cooling.

PRODUCT CHARACTERISTICS

Test	Method	Typical Characteristics
Appearance	Visual	Bright & Clear
Kinematic Viscosity at 40 Deg. C, Cst	IP 71	220
Viscosity Index	IP 226	96
Flash Point, COC, Deg. C	IP 36	225
Conradson Carbon Residue, wt%	IP 13	0.5
TAN mg KOH/g	IP 1	1.1
Rust Preventive Characteristics	ASTM D 665 (A & B)	Passes

Available in 1Lt. & 5Lts. Packs

A Premium Product from CASTROL INDIA LIMITED

Authorised Distributor

☎ : 20361, 21445
M/s R. D. Dutta & Co Pvt Ltd.
A-6, Mohan Bazar
Bhiwadi (Alwar) Raj.

INGERSOLL-RAND®

Ingersoll-Rand (India) Ltd.
Plant 1, G.I.D.C. Estate,
Naroda, Ahmedabad-382 330.

Disclaimer : Nothing contained within this brochure is intended to extend any warranty or representation expressed or implied, regarding the products described herein. Any such warranties or other items or conditions of sale of products shall be in accordance with Ingersoll-Rand standard Terms & Conditions of sale of such products, which are available upon request.

Product improvement is a continuing goal at Ingersoll-Rand. Designs and specifications are subjected to change without notice or obligation.